

RTD RS232 Converter 4 channel

DAT 3014

FEATURES

- Modbus Server device on RS-232
- Modbus RTU/ Modbus ASCII protocol
- 4 input channels
- Input configurable for RTD, Resistance and Potentiometer
- Watch-Dog Alarm
- Remotely Configurable
- 2000 Vac 3-ways Galvanic Isolation
- LED of signalling on front side for power supply and communication
- Connection by removable screw terminals
- High accuracy
- CE / UL / UKCA mark
- DIN rail mounting in compliance with EN-50022



GENERAL DESCRIPTION

The DAT 3014 device is able to acquire up to 4 analogue input signals. The data are transmitted with MODBUS RTU/MODBUS ASCII protocol on the RS-485 network (RS-232 interface is available).

It is possible to connect on input RTD, Potentiometer or Resistance sensor. The device guarantees high accuracy and stable measure versus time and temperature. To ensure the plant safety, it is provided a Watch-Dog timer alarm.

The isolation between the parts of circuit removes eventual ground-loop effects, allowing the use of the device even in the heavy environmental conditions.

The device is in compliance with the Directive UL 61010-1 for US market and with the Directive CSA C22.2 No 61010-1 for the Canadian market.

It is housed in a rough self-extinguishing plastic container which, thanks to its thin profile of 17.5mm only, allows a high density mounting on EN-50022 standard DIN rail.

USER INSTRUCTIONS

Before to install the device, please read the "Installation Instruction" section.

If the module configuration is unknown, with device powered off, connect the INIT terminal to the GND terminal (ground), at the next power on the device will be auto-configured in the default settings (refer to the User Guide of the device).

Connect power supply, serial bus and analogue inputs as shown in the "Wiring" section.

The "PWR" LED state depends on the working condition of the device: see the "Light Signalling" section to verify the device working state.

To perform configuration and calibration operations, read the instructions in the User Guide of the device.

To simplify handling or replacing of the device, it is possible to remove the wired terminals even with the device powered.


TECHNICAL SPECIFICATIONS (Typical @ 25 °C and in the nominal conditions)

| INPUT | | | SERIAL OUTPUT | GENERAL SPECIFICATIONS | |
|--|---------|--------|--|---------------------------------|---------------------------|
| Input Type | Min | Max | Data Transmission | Power supply voltage | 10 .. 30 Vdc |
| RTD 2 or 3 wires Pt100 Pt1000 Ni100 Ni1000 | -200 °C | 850 °C | RS-485 asynchronous serial Baud Rate 115.2 Kbps Max. distance 1.2 Km – 4000 ft | Reverse polarity protection | 60 Vdc max |
| | -200 °C | 400 °C | | Max. Current consumption | 30 mA |
| | -60 °C | 180 °C | | ISOLATION | |
| | -60 °C | 150 °C | | Among all the ways | 2000 Vac, 50 Hz, 1 min |
| | | | | ENVIRONMENTAL CONDITIONS | |
| RES. 2 or 3 wires Low High | 0 Ω | 500 Ω | Operative temperature | -10°C .. +60°C | |
| | 0 Ω | 2000 Ω | UL Operative Temperature | -10°C .. +40°C | |
| POT (Nominal R) Low High | 20 Ω | 500 Ω | Storage temperature | -40°C .. +85°C | |
| | 20 Ω | 2000 Ω | Humidity (not condensing) | 0 .. 90 % | |
| | | | Maximum Altitude | 2000 m slm | |
| Input Accuracy (1) RTD ±0.05 % f.s. Resistance ±0.05 % f.s. Potentiometer ±0.05 % f.s. Linearity (1) RTD ± 0.1 % f.s. Lead wire resistance influence RTD/res.3 wires(50 Ω max balanced) 0.05 f.s. % / Ω RTD excitation current Typical 0.350 mA Thermal drift (1) Full scale ± 0.01 % / °C Sample time 0.5 ÷ 1 sec. Warm-up time 3 min. < | | | | | |

INSTALLATION INSTRUCTIONS

The device is suitable for fitting to DIN rails in the vertical position. For optimum operation and long life follow these instructions: When the devices are installed side by side it may be necessary to separate them by at least 5 mm if panel temperature exceeds 45°C and at least one of the overload conditions exist. Make sure that sufficient air flow is provided for the device avoiding to place raceways or other objects which could obstruct the ventilation slits. Moreover it is suggested to avoid that devices are mounted above appliances generating heat; their ideal place should be in the lower part of the panel. Install the device in a place without vibrations. Moreover it is suggested to avoid routing conductors near power signal cables (motors, induction ovens, inverters etc...) and to use shielded cable for connecting signals.


CABLING

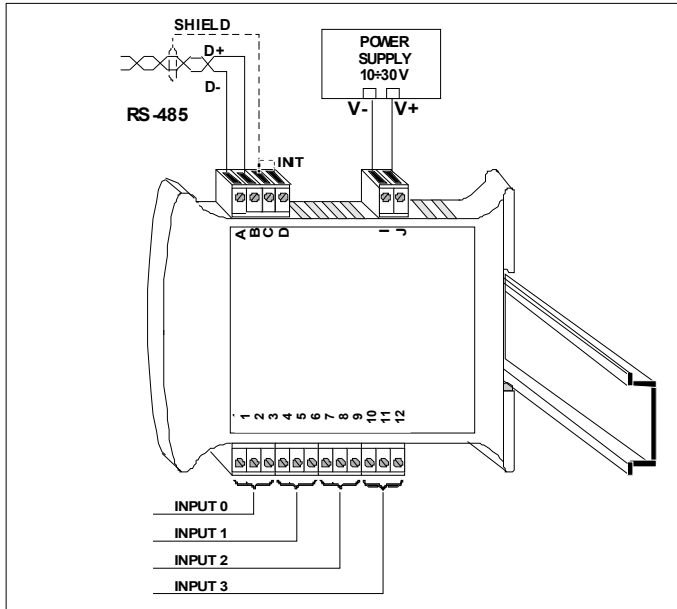


LIGHT SIGNALLING

| LED | COLOR | STATE | DESCRIPTION |
|-----|-------|-------------------|---|
| PWR | GREEN | ON | Device powered |
| | | OFF | Device not powered / Wrong RS-485 cabling. |
| | | FAST BLINKING | Communication in progress (the blinking frequency depends to baud-rate) |
| | | 1 second BLINKING | Watch-Dog Alarm condition |

ISOLATION STRUCTURE

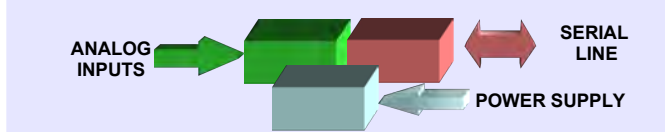


MECHANICAL DIMENSIONS (mm)

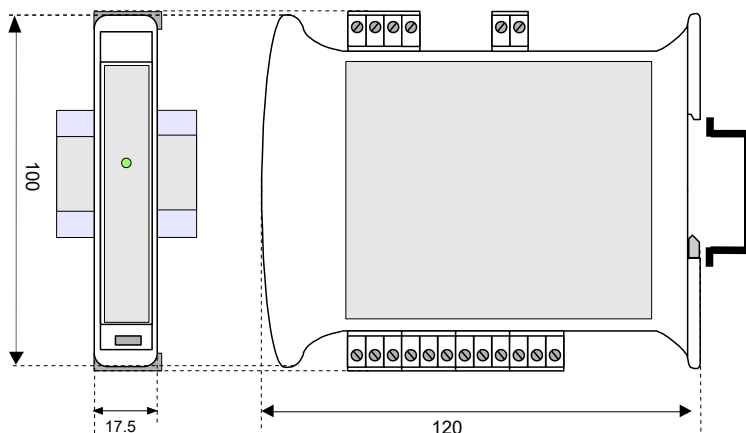


The symbol reported on the product indicates that the product itself must not be considered as a domestic waste. It must be brought to the authorized recycle plant for the recycling of electrical and electronic waste. For more information contact the proper office in the user's city, the service for the waste treatment or the supplier from which the product has been purchased.

WIRING

POWER SUPPLY (*)




INIT




(*) Note: for UL installation the device must be powered using a power supply unit classified NEC class 2 or SELV with limited energy

ANALOG INPUTS


RTD/RES 2 WIRES

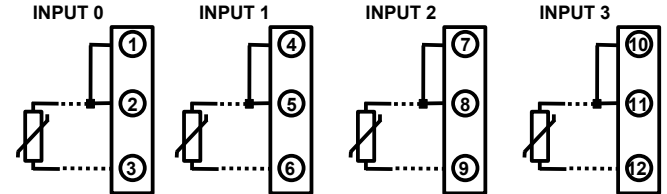

RTD/RES 3 WIRES

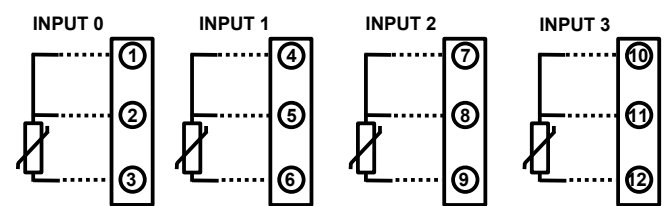


POTENTIOMETER

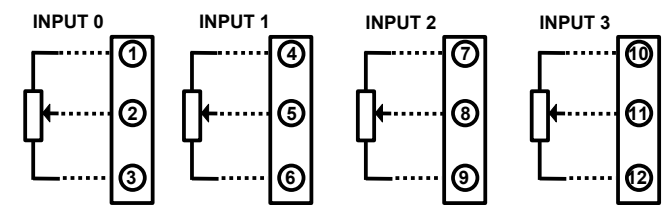


NOTE: input channels are not isolated between them 3-6-9-12 = Ref.

RS-485



RS-232

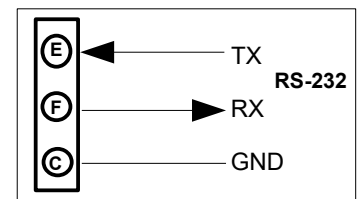

HOW TO ORDER

In the order, it is necessary to specify the interface type (RS485 or RS232). The device can be supplied with the configuration specified by the customer.

ORDER CODE:

DAT 3014 / 232 / Pt100

Interface type
485 : RS-485
232 : RS-232

Input type

■ = Requested
□ = Optional