

FEATURES

- 0÷20 mA isolated conversion
- No external supply required
- Two isolated channels
- 1500 Vac galvanic isolation
- Good accuracy and performance stability
- EMC compliant – CE mark
- Suitable for DIN rail mounting in compliance with EN 50022 and EN-50035

GENERAL DESCRIPTION

The transmitter DAT 512 is a passive 0÷20 mA current loop isolator. It has two isolated channels. The input current, variable from 0 up to 20 mA is converted in an output current of the same value but keeping a galvanic isolation from the input circuit. The converter is a passive isolator: this means that the device uses the input signal to power itself, so it does not require any external power supply. The 1500 Vac galvanic isolation on all ways eliminates the effects of all ground loops eventually existing and allows the use of the converter in heavy environmental conditions found in industrial applications. It is housed in a plastic enclosure of 22.5 mm thickness suitable for DIN rail mounting in compliance with EN-50022 and EN-50035 standards.

USER INSTRUCTIONS

The input connections must be made as shown in the section "Input connections".
The output connections must be made as shown in the section "Output connections".

Notes of installation:


- the DAT 512 causes a maximum voltage drop of 5 Vdc on the input current loop;
 - if there is an interruption either in the input or in the output current loop, the output signal will be 0 mA.**
- To install the device refer to section "Installation Instructions".

TECHNICAL SPECIFICATIONS (Typical @ 25 °C and in nominal conditions)


INPUT			OUTPUT			ISOLATION
Input Type	Min	Max	Tipo di segnale	Min	Max	Input / Output 1500 Vac, 50 Hz, 1 min
Current	0 mA	20 mA	Corrente	0 mA	20 mA	ENVIRONMENTAL CONDITIONS Operative Temperature -20°C .. +60°C Storage Temperature -40°C.. +85°C Humidity (not condensed) 0 .. 90 % Maximum Altitude 2000 m Installation Indoor Category of installation II Pollution Degree 2
Input Impedance ~ 50 Ω Maximum Input Signal 50 mA Max Voltage Drop 5 Vdc Reverse polarity protection 60 Vdc max	Load Resistance (Rload) ≤ 700 Ω Transfer Error ± 0,50 % del f.s. Linearity Error ± 0,05 % del f.s. Thermal Drift ± 0,02 % del f.s./°C Load resistance influence ± 0,09 % del f.s./100 Ω Response Time (10 ÷ 90%) < 60 ms	MECHANICAL SPECIFICATIONS Material Self-extinguish plastic IP Code IP20 Wiring wires with diameter 0.8÷2.1 mm ² /AWG 14-18 Tightening Torque 0.8 N m Mounting in compliance with DIN rail standard EN-50022 and EN-50035 Weight about 110 g				
						CERTIFICATIONS EMC (for industrial environments) Immunity EN 61000-6-2 Emission EN 61000-6-4

CONNECTIONS

INPUT CONNECTIONS

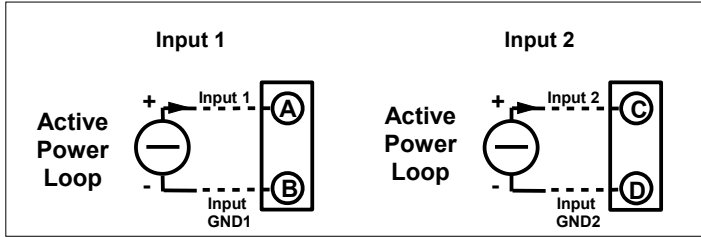

OUTPUT CONNECTIONS (**)

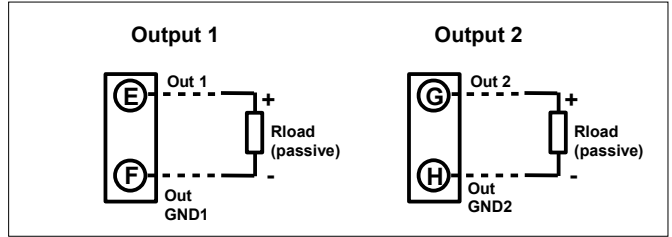

() Note: if there is an interruption either in the input or in the output current loop, the output signal will be 0 mA.**

INSTALLATION INSTRUCTIONS

The device is suitable for fitting to DIN rails in the vertical position.


For optimum operation and long life follow these instructions:

When the devices are installed side by side it may be necessary to separate them by at least 5 mm.


Make sure that sufficient air flow is provided for the device avoiding to place raceways or other objects which could obstruct the ventilation slits. Moreover it is suggested to avoid that devices are mounted above appliances generating heat; their ideal place should be in the lower part of the panel.

Install the device in a place without vibrations.

ISOLATION STRUCTURE

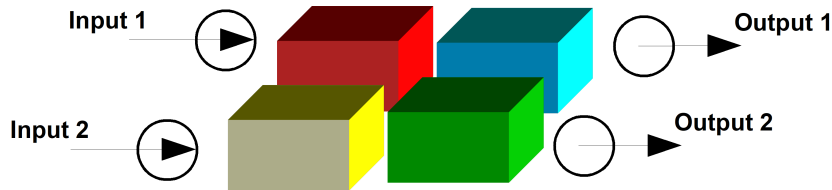

MECHANICAL DIMENSIONS (mm)

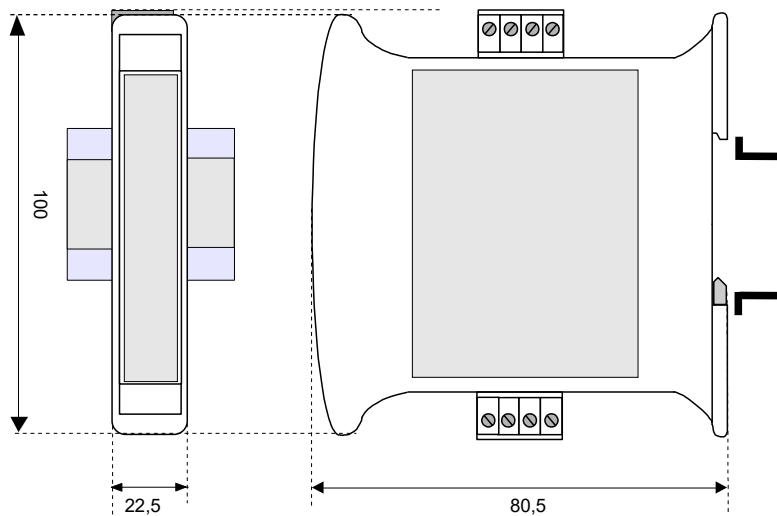

The symbol reported on the product indicates that the product itself must not be considered as a domestic waste. It must be brought to the authorized recycle plant for the recycling of electrical and electronic waste. For more information contact the proper office in the user's city, the service for the waste treatment or the supplier from which the product has been purchased.

HOW TO ORDER

ORDER CODE EXAMPLE:
DAT512