

FEATURES

- Acquisition of analogue signals on PLC's digital I/O
- Analogue input to any PLC or micro PLC
- Up to 16-bit resolution with Full Scale high accuracy
- 2 input channels
- Configurable input for voltage up to $\pm 1V$ or Tc type J,K, R,S,B,E,T,N
- Configurable by DIP-switch
- Galvanic isolation at 2000 Vac on three ways
- EMC compliant – CE mark
- Suitable for DIN rail mounting in compliance with EN 50022 and EN-50035



GENERAL DESCRIPTION

The device DAT6011 is designed to measure, amplify and linearise two analogue signals coming from Tc and mV sensors in a 16 bits resolution digital words that contain the input values. The digital signal is transferred to PLC by one of its digital inputs. The data transfer must be controlled by the PLC by the generation of a clock signal over one of its digital ports.

It is housed in a plastic enclosure of 12.5 mm thickness suitable for DIN rail mounting in compliance with EN-50022 and EN-50035 standards.

USER INSTRUCTIONS

Before to install the device, read carefully the section "Installation instructions"


Connect the power supply, the PLC and the analogue inputs as shown in the section "Wiring".

If necessary, configure the devices by dip-switch on the side of the device as shown in the section "Configuration"

I LED "PWR" and "DATA" indicates the status of the device: refer to the section "Light Signalling" to verify the device working.

DATA ACQUISITION PROCEDURE (example in the picture)

To get data from the device, the PLC must generate an enabling signal (ENABLE) and a clock (CLK) to the proper device's terminals. If the enable is high, at each rise edge of the clock signal, the device provides on the data line (DATA) one of the bit of reading. Each word is built of 1 synchronism bit followed from 16 bit for each analogue input. Each word has 33 bits length. The rise edge of the ENABLE signal allow the reset of reading cycle.

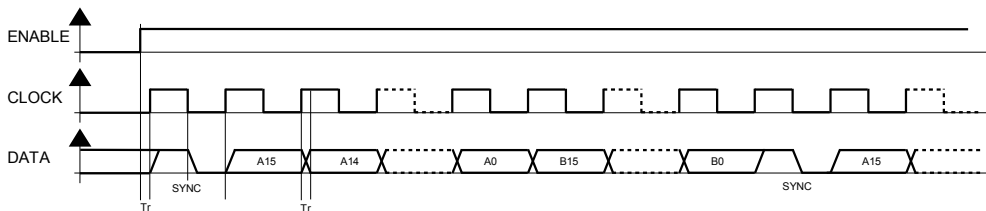

TECHNICAL SPECIFICATIONS (Typical at 25 °C and in nominal conditions)

Input type	Min	Max	ANALOGUE INPUT		POWER SUPPLY			
Voltage			Input impedance		Supply voltage	18 .. 30 Vdc		
50 mV	-50 mV	+50 mV	mV, Tc	$\geq 1 \text{ M}\Omega$	Current consumption	30 mA @ 24 Vdc		
100 mV	-100 mV	+100 mV	Thermal drift (1)		Reverse polarity protection	60 Vdc max		
500 mV	-500 mV	+500 mV	Full Scale	$\pm 0.005 \% / ^\circ\text{C}$	Max. current consumption	45 mA		
1000 mV	-1000mV	+1000mV	CJC thermal drift		ISOLATION			
Thermocouple			Full Scale	$\pm 0.02 \% / ^\circ\text{C}$	Inputs – PLC	2000 Vac 50 Hz, 1 min.		
J	-210 °C	+1200 °C	Input line impedance influence (1)		Power supply – Inputs	2000 Vac 50 Hz, 1 min.		
K	-210 °C	+1372 °C	mV, Tc	$< 0.8 \text{ uV}/\text{Ohm}$	Power supply – PLC	2000 Vac 50 Hz, 1 min.		
R	-50 °C	+1767 °C	Warm-up time	3 minutes for Tc	ENVIRONMENTAL CONDITIONS			
S	-50 °C	+1767 °C	Sampling time	$\sim 0.3 \text{ sec.}$	Operative Temperature	-10°C .. +60°C		
B	+400 °C	+1825 °C	DIGITAL INTERFACE		Storage Temperature	-40°C.. +85°C		
E	-210 °C	+1000 °C	Voltage on terminals	typical 24 Vdc (30 Vdc max.) > 9 Vdc	Humidity (not condensed)	0 .. 90 %		
T	-210 °C	+400 °C	Input impedance	4.7 KOhm	Maximum Altitude	2000 m		
N	-210 °C	+1300 °C	Minimum output load	560 Ohm (2)	Installation	Indoor		
Input channels:	2		Max. clock signal frequency	500 Hz	Category of installation	II		
Input calibration (1)	$\pm 0.05\% \text{ f.s.}$		Rise / Fall time (Tr)	$< 0.2 \text{ ms}$	Pollution Degree	2		
Linearity (1)			MECHANICAL SPECIFICATIONS					
mV	$\pm 0.1\% \text{ f.s.}$		Material				Self-extinguish plastic	
Tc	$\pm 0.2\% \text{ f.s.}$		ON state				IP20	
Cold junction compensation	$\pm 0.5 ^\circ\text{C}$		Input impedance				wires with diameter	
			(ENABLE, CLK)				0.8÷2.1 mm ² /AWG 14-18	
			Minimum output load				Tightening Torque	0.8 N m
			(DATA)				Mounting	in compliance with DIN rail standard EN-50022 and EN-50035
			EMC (for industrial environments)				Weight	about 50 g.
			Immunity				EN 61000-6-2	
			Emission				EN 61000-6-4	

(1) referred to input Span (difference between max. and min. values)

(2) The load on the output DATA is controlled with the current taken from the ENABLE signal

INSTALLATION INSTRUCTIONS

The DAT 6011 device is suitable for fitting to DIN rails in the vertical position.

For optimum operation and long life follow these instructions:

When the devices are installed side by side it may be necessary to separate them by at least 5 mm in the following case:


- If panel temperature exceeds 45°C device powered by an high power supply voltage: >27Vdc.

Make sure that sufficient air flow is provided for the device avoiding to place raceways or other objects which could obstruct the ventilation slits. Moreover it is suggested to avoid that devices are mounted above appliances generating heat; their ideal place should be in the lower part of the panel.

Install the device in a place without vibrations.

Moreover it is suggested to avoid routing conductors near power signal cables (motors, induction ovens, inverters, etc...) and to use shielded cable for connecting signals.

CABLING

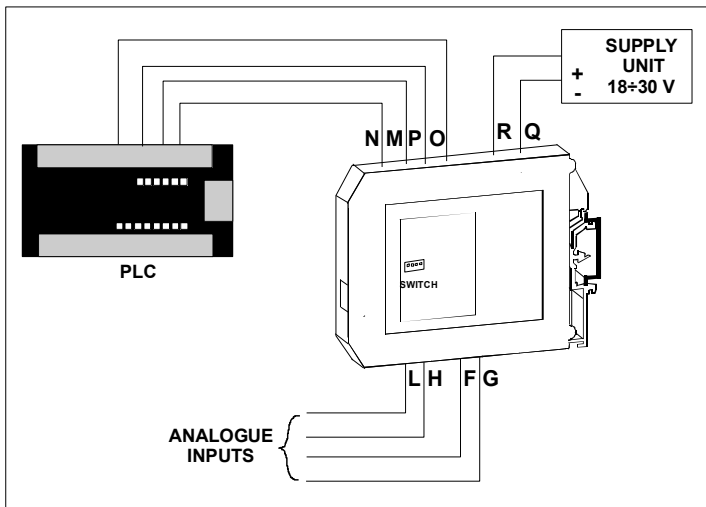

PROGRAMMING TABLE


SW4	Filter (CLK)
	1 ms (500 Hz)
●	10 ms (50 Hz)

● = Switch ON

* Specify in phase of order


SW3	SW2	SW1	Input *	
			TAB. A	TAB. B
			Tc J	50 mV
		●	Tc K	100 mV
	●		Tc T	500 mV
	●	●	Tc E	1000 mV
●			Tc R	----
●		●	Tc S	----
●	●		Tc B	----
●	●	●	Tc N	----

DIMENSIONS (mm)

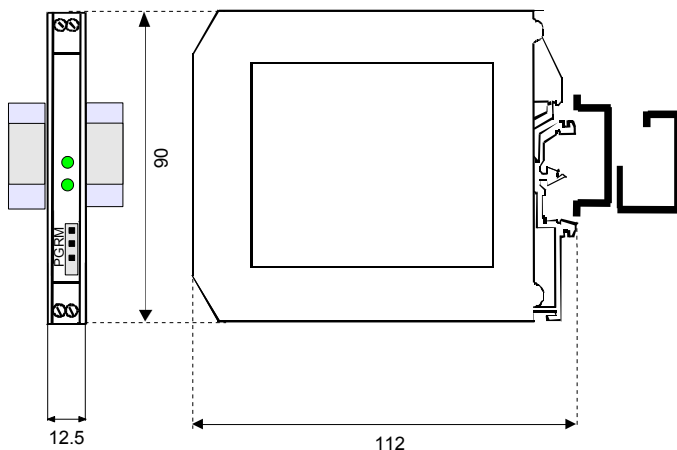


WIRING


ANALOGUE INPUTS CONNECTIONS

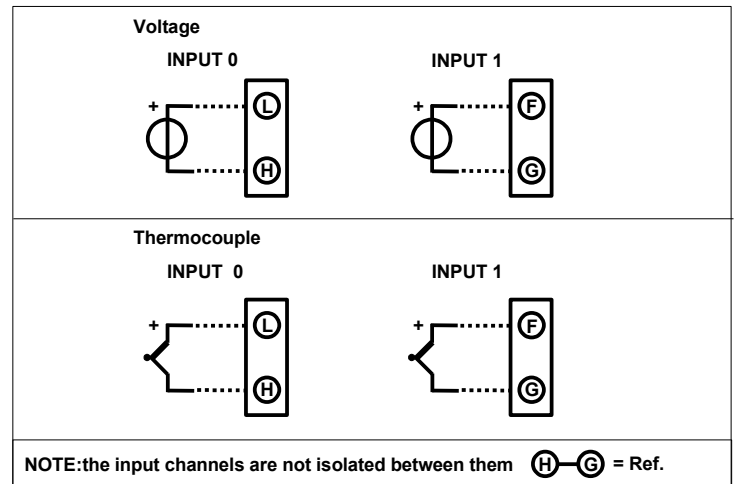


PLC CONNECTION

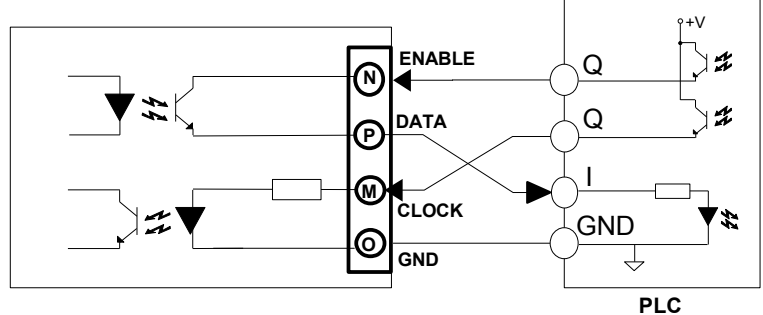

POWER SUPPLY CONNECTIONS

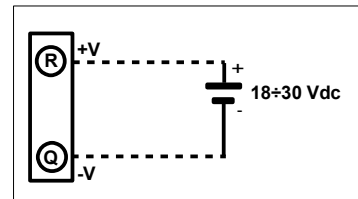

ISOLATION STRUCTURE

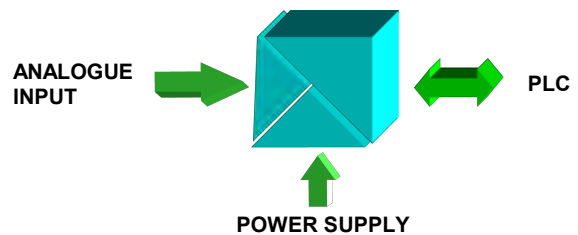

LIGHT SIGNALLING

LED	COLOUR	STATE	DESCRIPTION
PWR	GREEN	ON	Device powered
		OFF	Device not powered
DATA	GREEN	ON	"DATA" Line = 1
		OFF	"DATA" Line = 0

HOW TO ORDER

In phase of order it is necessary to specify the type of table for the input. The DAT 6011 is supplied as requested from the Customer. Refer to the section "Programming table" for the available options

DAT 6011 / **A** / Tc K / 10mS

Table:
A : Thermocouples
B : mV

Input type
(see programming
table)

CLK filter

■ = Requested
□ = Optional