

## Modbus RTU RS485 4 Digital Input, 8 Digital Output Module

## DAT 3188/4

### FEATURES

- Modbus Server device on RS-485
- Modbus RTU/ Modbus ASCII protocol
- 4 digital inputs
- 8 digital outputs type PNP
- Watch-Dog alarm
- Four ways galvanic isolation
- CE / UL / UKCA mark
- DIN rail mounting in compliance with EN-50022



### GENERAL DESCRIPTION

The device DAT 3188/4 is able to acquire up to 4 digital inputs and to drive up to 8 PNP transistor outputs. The data are transmitted with MODBUS RTU/MODBUS ASCII protocol on the RS-485 network (RS-232 interface is available).

To ensure the plant safety, it is provided a Watch-Dog timer alarm.

The isolation between the parts of circuit removes eventual ground-loop effects, allowing the use of the device even in the heavy environmental conditions.

The device is in compliance with the Directive UL 61010-1 for US market and with the Directive CSA C22.2 No 61010-1 for the Canadian market.

It is housed in a rough self-extinguishing plastic container which, thanks to its thin profile of 17.5mm only, allows a high density mounting on EN-50022 standard DIN rail.

### USER INSTRUCTIONS

Before to install the device, please read the "Installation Instruction" section.

If the module configuration is unknown, with device powered off, connect the INIT terminal to the GND terminal (ground), at the next power on the device will be auto-configured in the default settings (refer to the User Guide of the device).

Connect power supply, serial bus, digital inputs and transistor outputs as shown in the "Wiring" section.

The "PWR" LED state depends on the working condition of the device: see the "Light Signalling" section to verify the device working state.

To perform configuration and calibration operations, read the instructions in the User Guide of the device.

To simplify handling or replacing of the device, it is possible to remove the wired terminals even with the device powered.

### TECHNICAL SPECIFICATIONS (Typical @ 25 °C and in the nominal conditions)

DIGITAL INPUTS		SERIAL OUTPUT	GENERAL SPECIFICATIONS	
<b>Number of Channels</b>	4	<b>Data Transmission (asynchronous serial RS-485)</b> Baud Rate115.2 Kbps Max. distance1.2 Km – 4000 ft	Power supply voltage	10 .. 30 Vdc
<b>Input voltage</b> (bipolar)	OFF State : 0÷3 V ON State : 10÷30 V		Reverse polarity protection	60 Vdc max
<b>Input Impedance</b>	4.7 KOhm		<b>Max. Current consumption</b>	45 mA
<b>Sample time</b>	5 ms		<b>ISOLATION</b> Between all ways  2000 Vac, 50 Hz, 1 min	
DIGITAL OUTPUTS			<b>ENVIRONMENTAL CONDITIONS</b>	
<b>Number of Channels</b>	8		Operative temperature	-10°C .. +60°C
<b>Type</b>	PNP		UL Operative Temperature	-10°C .. +40°C
<b>Voltage</b>	10.5÷30 Vdc		Storage temperature	-40°C .. +85°C
<b>Max. Load</b>	500 mA per channel(*) 1 A per module		Humidity (not condensing)	0 .. 90 %
<b>Inductive Load</b>	48 Ω – 2H max		Maximum Altitude	2000 m slm
(*) Protection against over-current and over-temperature Short circuit current 1.7 A max.			Installation	Indoor
			Category of Installation	II
			Pollution Degree	2
		<b>MECHANICAL SPECIFICATIONS</b>		
		Material	Self-extinguish plastic	
		IP Code	IP20	
		Wiring	wires with diameter 0.8÷2.1 mm <sup>2</sup> AWG 14-18	
		Tightening Torque	0.5 N m	
		Mounting	in compliance with DIN rail standard EN-50022	
		Weight	about 150 g.	
		<b>CERTIFICATIONS</b>		
		<b>EMC ( for the Industrial Environments )</b>		
		Immunity	EN 61000-6-2	
		Emission	EN 61000-6-4	
		<b>UKCA (ref S.I. 2016 N°1091 )</b>		
		Immunity	BS EN 61000-6-2	
		Emission	BS EN 61000-6-4	
		<b>UL</b>		
		US Standard	UL 61010-1	
		Canadian Standard	CSA C22.2 No 61010-1	
		CCN	NRAQ/NRAQ7	
		Typology	Open Type device	
		Classification	Industrial Control Equipment	
		File Number	E352854	

## INSTALLATION INSTRUCTIONS


The device is suitable to be mounted on DIN rail, in vertical position. For a correct working and a long life of the device, read the following indications. In case of the devices are mounted side by side, please leave about 5mm between if the temperature in the cabinet higher than 45 °C and high supply voltage (>27Vdc).

Avoid to place raceways or other objects which could obstruct the ventilation slits. It is suggested to avoid that devices are mounted above appliances generating heat; their ideal place should be in the lower part of the panel.

Avoid to install the devices in a site where vibrations are present.

It is recommended to use shielded cable for connecting signals. The shield must be connected to an earth wire provided for this purpose. Moreover it is suggested to avoid routing conductors near power signal cables.

## CABLING

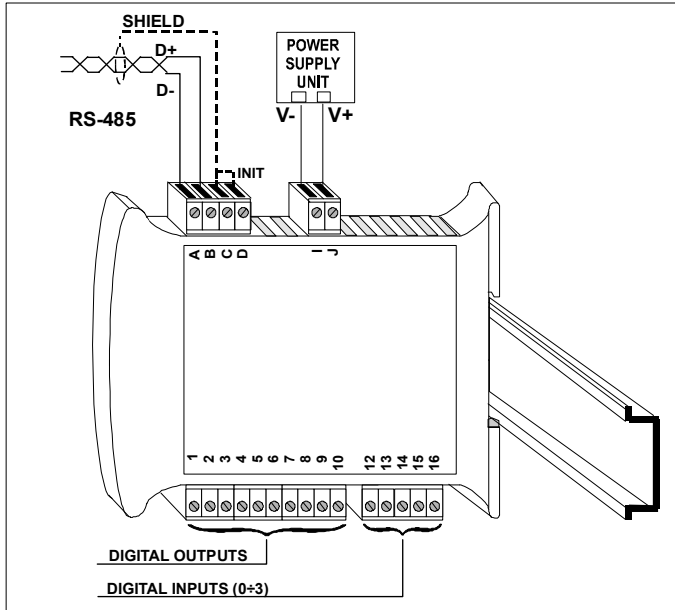


## LIGHT SIGNALLING

LED	COLOR	STATE	DESCRIPTION
PWR	GREEN	ON	Device powered
		OFF	Device not powered / Wrong RS-485 cabling.
		FAST BLINKING	Communication in progress (the blinking frequency depends on baud-rate)
		1 second BLINKING	Watch-Dog Alarm condition

## ISOLATION STRUCTURE




## MECHANICAL DIMENSIONS (mm)

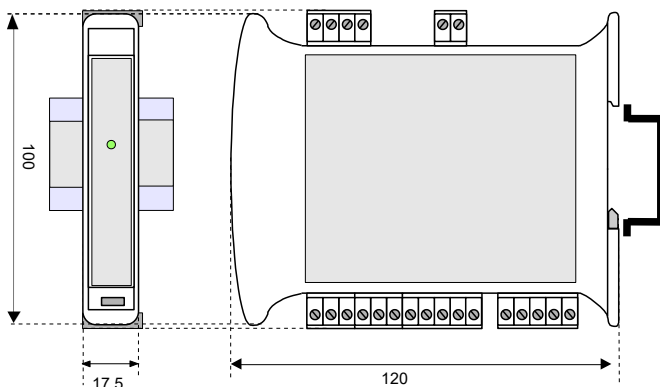


## WIRING

### POWER SUPPLY (\*)




### INIT




(\*) Note: for UL installation the device must be powered using a power supply unit classified NEC class 2 or SELV with limited energy

### DIGITAL INPUTS

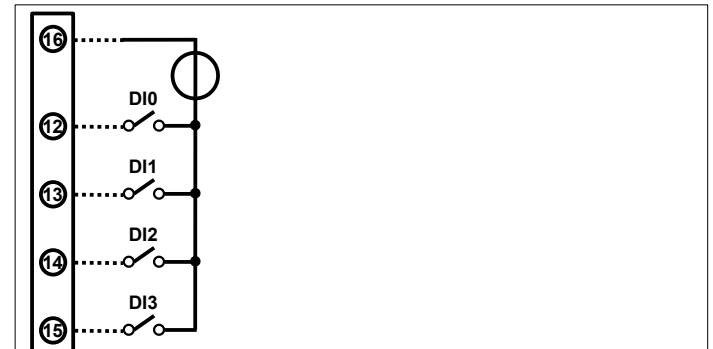


NOTE: Input channels are not insulated between them


### DIGITAL OUTPUTS

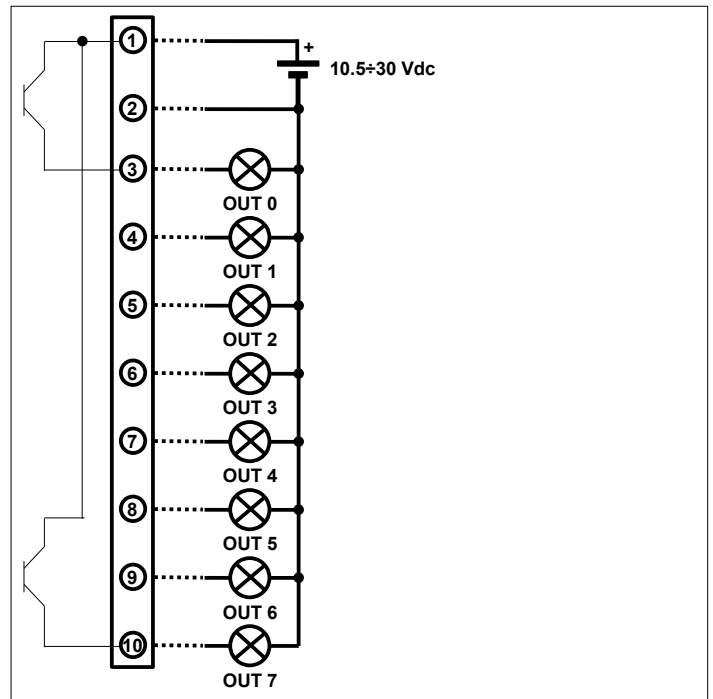

### RS-485



### RS-232

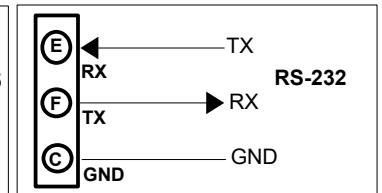

## HOW TO ORDER

### ORDER CODE:

DAT 3188/4



The symbol reported on the product indicates that the product itself must not be considered as a domestic waste. It must be brought to the authorized recycle plant for the recycling of electrical and electronic waste. For more information contact the proper office in the user's city, the service for the waste treatment or the supplier from which the product has been purchased.