

Phone: +1 561 779 5660 E-mail : Info@datexel.com Web Site : www.datexel.com

4 to 20 mA Loop Powered Isolator

FEATURES

- 0÷20 mA isolated conversion
- No external supply required
- 1500 Vac galvanic isolation
- Good accuracy and performance stability
- EMC compliant CE / UKCA mark
- Suitable for DIN rail mounting in compliance with EN 50022



GENERAL DESCRIPTION

The DAT 511 is a passive 0+20 mA current loop isolator.

- The input current, variable from 0 up to 20 mA, is converted in an output current of the same value but keeping a galvanic isolation from the input circuit.
- The device is a passive isolator: this means that the device uses the input signal to power itself, so it does not require any external power supply. The 1500 Vac galvanic isolation on all ways eliminates the effects of all ground loops eventually existing and allows the use of the converter in heavy environmental conditions found in industrial applications.
- It is housed in a plastic enclosure of 22.5 mm thickness suitable for DIN rail mounting in compliance with EN-50022.

USER INSTRUCTIONS

The connections must be made as shown in the section "Wiring".

Notes of installation:

- the DAT 511 causes a maximum voltage drop of 5 Vdc on the input current loop;

<u>- if there is an interruption either in the input or in the output current loop, the output signal will be 0 mA.</u> To install the device refer to section "Installation Instructions".

TECHNICAL SPECIFICATIONS (Typical @ 25 °C and in nominal conditions)

INPUT			ОИТРИТ			GENERAL SPECIFICATIONS	
Type of signal	Min 0 mA	Max 20 mA	Type of signal	Min 0 mA	Max	ISOLATION Input / Output	1500 Vac, 50 Hz, 1 min
Current 0 mA Input Impedance Maximum Input Signal Max Voltage Drop Reverse polarity protection		20 mA ~ 50 Ω 50 mA 5 Vdc max 60 Vdc max	Current0 mA20 mALoad Resistance (Rload) \leq 700 Ω Transfer Error \pm 0,50 % del f.s.Linearity Error \pm 0,05 % del f.s.Thermal Drift \pm 0,02 % del f.s./°CLoad resistance influence \pm 0,09 % del f.s./100 Ω Response Time (10 \div 90%) \leq 60 ms		ENVIRONMENTAL CONDITIONSOperative Temperature-20°C +60°CStorage Temperature-40°C +85°CHumidity (not condensed)0 90 %Maximum Altitude2000 mInstallationIndoorCategory of installationIIPollution Degree2		
						IP Code Wiring Tightening Torque Mounting	A TIONS Self-extinguish plastic IP20 wires with diameter 0.8+2.1 mm ² /AWG 14-18 0.8 N m in compliance with DIN rail standard EN-50022 about 100 g
						Emission EN UKCA (Rif S.I. 2016 N°10 Immunity BS	61000-6-2 61000-6-4

INSTALLATION INSTRUCTIONS

The device is suitable for fitting to DIN rails in the vertical position.


For optimum operation and long life follow these instructions:

when the devices are installed side by side it may be necessary to separate them by at least 5 mm.


Make sure that sufficient air flow is provided for the device avoiding to place raceways or other objects which could obstruct the ventilation slits. Moreover it is suggested to avoid that devices are mounted above appliances generating heat; their ideal place should be in the lower part of the panel.

Install the device in a place without vibrations.

WIRING

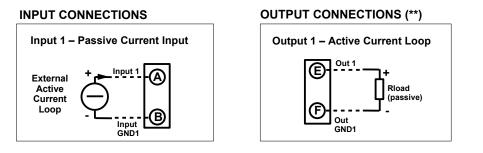

(**) Note: if there is an interruption either in the input or in the output current loop, the output signal will be 0 mA.

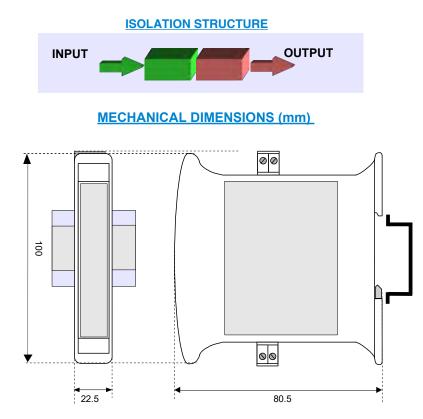

The symbol reported on the product indicates that the product itself must not be considered as a domestic waste. It must be brought to the authorized recycle plant for the recycling of electrical and electronic waste.

For more information contact the proper office in the user's city , the service for the waste treatment or the supplier from which the product has been purchased.

HOW TO ORDER

ORDER CODE EXAMPLE:

DAT511